



TUV PL-L

TUV PL-L 18W/4P 1CT/25

TUV PL-L lamps are compact UV-C lamps emitting a peak at 253.7 nm. The compact size of the lamp allows for a small system design and design flexibility. TUV PL-L lamps offer almost constant UV output over their complete lifetime. Thanks to the single-ended lamp base, lamp replacement is easy.

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- DANGER: Risk Group 3 Ultra Violet product. These lamps emit high-power UV radiation that can cause severe injury to skin and eyes. Avoid eye and skin exposure to unshielded product. Use only in an enclosed environment which shields users from the radiation.
- Plants and/or materials that are exposed to UV-C and/or ozone for a long time may become damaged and/or discolored.

Product data

General information		Voltage (Nom)	
Cap-Base	2G11 [2G11]	58 V	
Main Application	Disinfection	Mechanical and housing	
Useful Life (Nom)	9000 h	Cap-Base Information	4 Pins
System Description	-	Bulb Shape	2xT16
Light technical		Approval and application	
Color Code	TUV	Mercury (Hg) Content (Nom)	4.4 mg
Color Designation	- [Not Specified]	UV	
Depreciation at Useful Lifetime	20 %	UV-C Radiation at 100 hr	4.7 W
Operating and electrical		Product data	
Power (Nom)	18 W	Full product code	871150062492540
Lamp Current (Nom)	0.375 A		

TUV PL-L

Order product name	TUV PL-L 18W/4P 1CT/25
EAN/UPC - Product	8711500624925
Order code	927903004007
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25



Material Nr. (12NC)	927903004007
Net Weight (Piece)	60.900 g

Dimensional drawing

Product	D1 (max)	D (max)	A (max)	B (max)	C (max)
TUV PL-L 18W/4P 1CT/25	18 mm	39 mm	195 mm	220 mm	225 mm

TUV PL-L 18W/4P 1CT/25

Photometric data

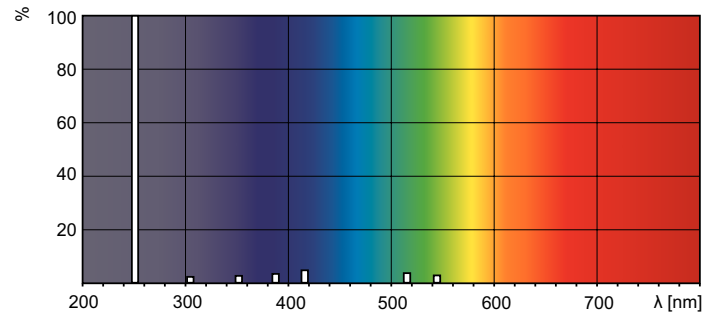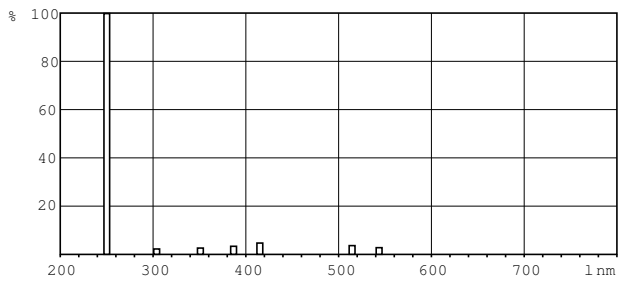

XDPO_XUTUVPLL-Spectral power distribution Colour

